



JELLEY



**2021
CATALOGUE**




DURABILITY . POWERFUL . EFFICIENCY



JELLEY


BATTERY CAULKING DISPENSER

BCD10

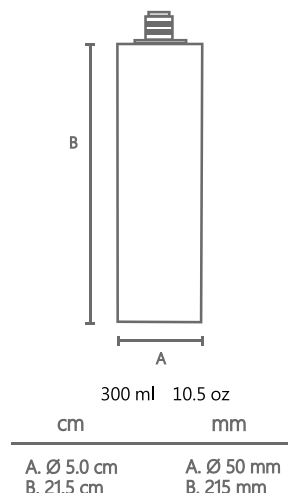

MODEL NO.	BCD10		
CAPACITY	300 ml	10.14 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	75 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	5.5 mm/sec	13.0 in/min	

BCD12

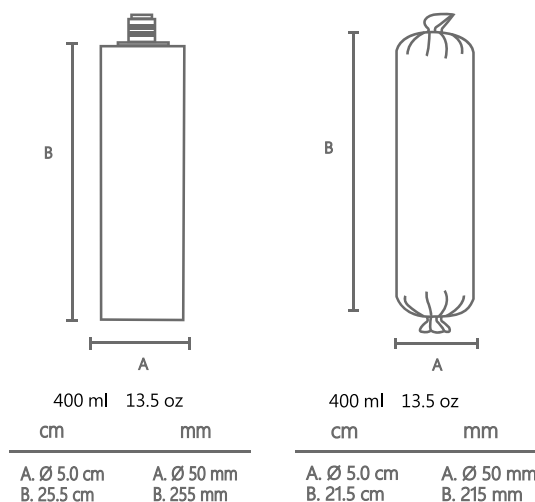


MODEL NO.	BCD12		
CAPACITY	400 ml	13.5 oz	CARTRIDGE/ SAUSAGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	75 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	5.5 mm/sec	13.0 in/min	

JELLEY


BATTERY CAULKING DISPENSER

BCD14

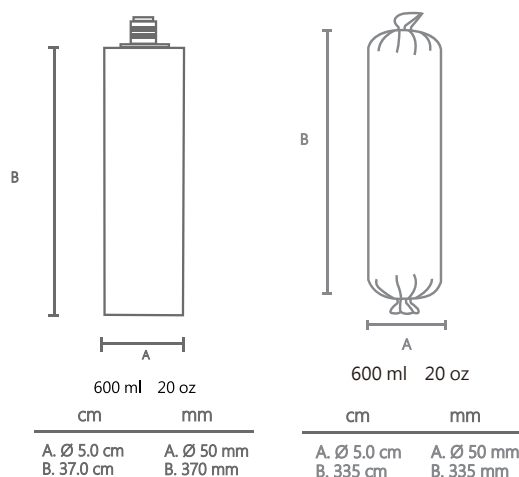

MODEL NO.	BCD14		
CAPACITY	600 ml	20 oz	CARTRIDGE/ SAUSAGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	50 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	5.5 mm/sec	13.0 in/min	

BCD29

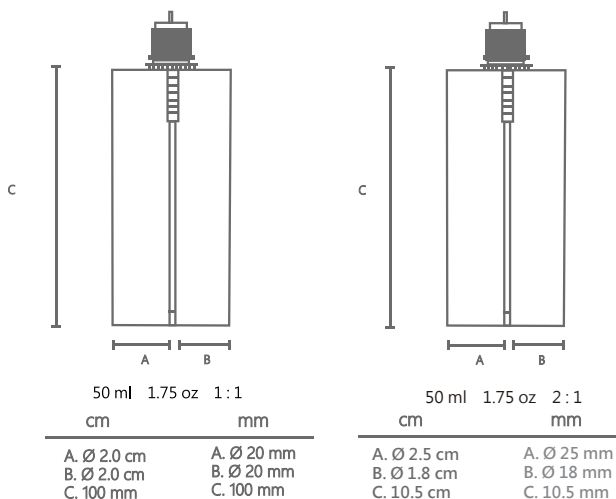


MODEL NO.	BCD12		
CAPACITY	400 ml	13.5 oz	CARTRIDGE/ SAUSAGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	75 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	5.5 mm/sec	13.0 in/min	

JELLEY


BATTERY CAULKING DISPENSER

BCD30

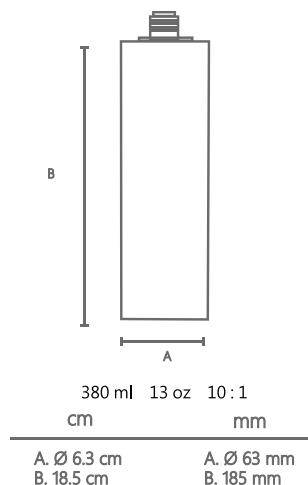

MODEL NO.	BCD30		
CAPACITY	380 ml	13 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	40 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	4.0 mm/sec	9.4 in/min	

BCD31

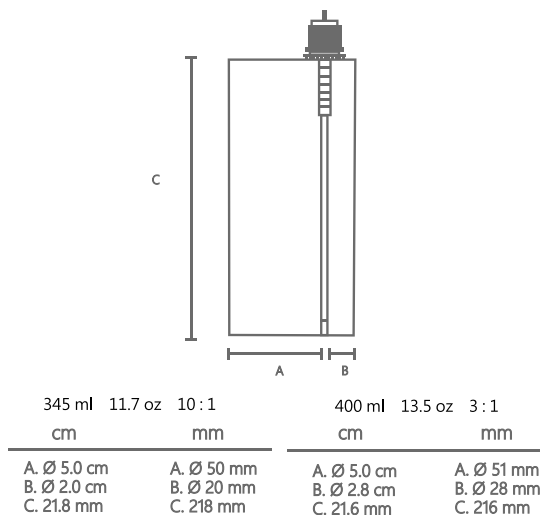


MODEL NO.	BCD31		
CAPACITY	345/ 400 ml	11.5/ 13.5 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	40 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	4.0 mm/sec	9.4 in/min	

JELLEY


BATTERY CAULKING DISPENSER

BCD32

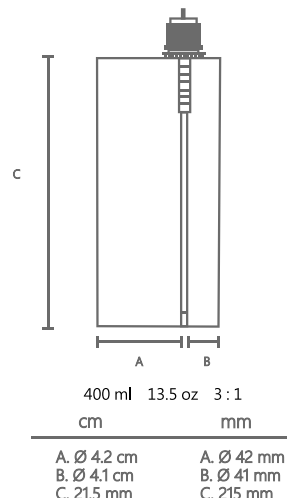

MODEL NO.	BCD32		
CAPACITY	400 ml	13.5 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	40 Tubes	REFERENCE
MAX FORCE	600 KGS	1323Lb	5880N
NO LOAD SPEED	4.0 mm/sec	9.4 in/min	

BCD36

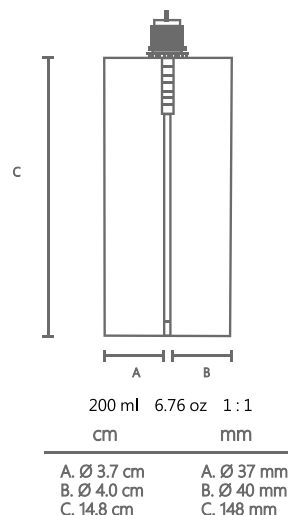


MODEL NO.	BCD36		
CAPACITY	200 ml	10.5 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	100 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	5.5 mm/sec	13.0 in/min	

JELLEY


BATTERY CAULKING DISPENSER

BCD38

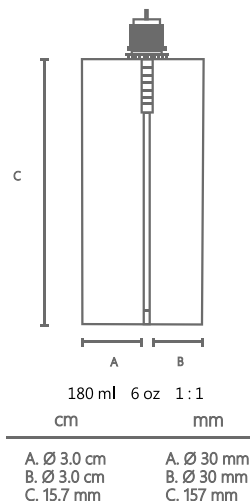

MODEL NO.	BCD38		
CAPACITY	180 ml	6 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	50 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	4.0 mm/sec	9.4 in/min	

BCD40

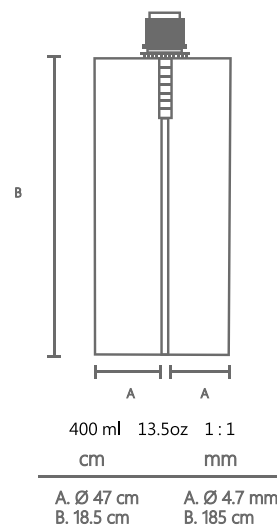


MODEL NO.	BCD40		
CAPACITY	400 ml	13.5 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	40 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	4.0 mm/sec	9.4 in/min	

JELLEY


BATTERY CAULKING DISPENSER

BCD41

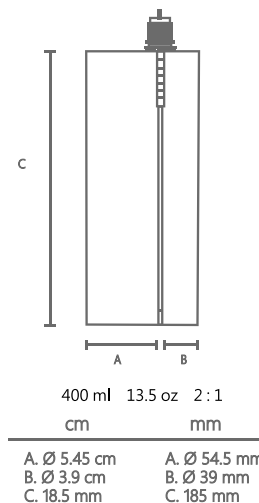

MODEL NO.	BCD41		
CAPACITY	400 ml	13.5 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	40 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	4.0 mm/sec	9.4 in/min	

BCD42

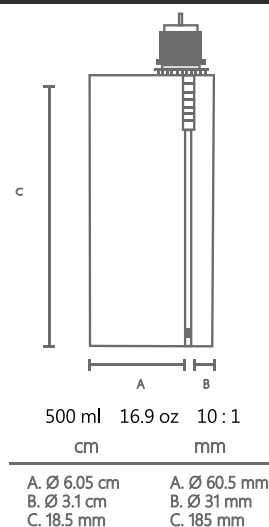


MODEL NO.	BCD42		
CAPACITY	500 ml	13.5 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	40 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	4.0 mm/sec	9.4 in/min	

JELLEY

BATTERY CAULKING DISPENSER


BCD43

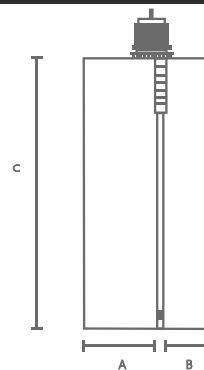

500 ml	13.5 oz	2 : 1	585 ml	19.8 oz	3 : 1
cm		mm	cm		mm
A. Ø 5.45 cm		A. Ø 54.5 mm	A. Ø 5.44 cm		A. Ø 54.4 mm
B. Ø 3.9 cm		B. Ø 39 mm	B. Ø 3.68 cm		B. Ø 36.8 mm
C. 18.5 mm		C. 185 mm	C. 2.45 mm		C. 245.5 mm

MODEL NO.	BCD43		
CAPACITY	385/ 585 ml	13.5/ 20 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	40 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	4.0 mm/sec	9.4 in/min	

BCD44

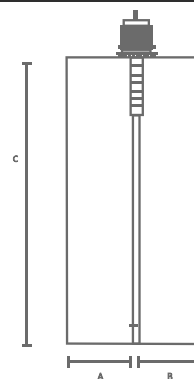

600 ml	20 oz	1 : 1
cm		mm
A. Ø 5.1 cm		A. Ø 51 mm
B. Ø 5.1 cm		B. Ø 51 mm
C. 2.16 mm		C. 216 mm

MODEL NO.	BCD44		
CAPACITY	300*2 ml	20 oz	CARTRIDGE
VOLTAGE	7.2 V	1.5Ah	10.8 WH
PERFORMANCE	1.5 A	40 Tubes	REFERENCE
MAX FORCE	450 KGS	992.3Lb	4410N
NO LOAD SPEED	4.0 mm/sec	9.4 in/min	

JELLEY

BATTERY BLIND RIVET

BBR10 P1 / 12mm Stroke



**MAX.
PULLING
FORCE
650KGS
(STROKE
12MM)**

MODEL NO.	BBR10 P1	
VOLTAGE	7.2 V	1.5Ah
PERFORMANCE	1.5 A	≈ 400 AS Rivets
MAX FORCE	650 KGS	992.3Lb
NO LOAD SPEED	4.0 mm/sec	9.4 in/min

A (HEAD DIA.)		B (BODY DIA.)		C (LENGT)		Al rivet	Steel rivet	Stainless Steel rivet	Stainless Steel rivet
Code	mm	mm	Inch	mm	Inch	Steel Shaft AS	Steel Shaft SS	Steel Shaft SSS	Steel Shaft SSSS
3-2	4.5	2.4	3/32	5.8	0.228	✓	✓	✓	✓
3-3	4.5	2.4	3/32	7.4	0.291	✓	✓	✓	✓
3-4	4.5	2.4	3/32	8.4	0.331	✓	✓	✓	✓
4-1	6.4	3.2	1/8	4.8	0.189	✓	✓	✓	✓
4-2	6.4	3.2	1/8	6.4	0.252	✓	✓	✓	✓
4-3	6.4	3.2	1/8	8	0.315	✓	✓	✓	✓
4-4	6.4	3.2	1/8	9.6	0.378	✓	✓	✓	✓
4-5	6.4	3.2	1/8	11.5	0.453	✓	✓	✓	✓
4-6	6.4	3.2	1/8	12.7	0.500	n/a	n/a	n/a	n/a
4-8	6.4	3.2	1/8	16.1	0.634	n/a	n/a	n/a	n/a
5-1	8	4	5/32	5.8	0.228	✓	✓	n/a	n/a
5-2	8	4	5/32	7	0.276	✓	✓	n/a	n/a
5-3	8	4	5/32	8.5	0.335	✓	✓	n/a	n/a
5-4	8	4	5/32	10	0.394	✓	✓	n/a	n/a
5-5	8	4	5/32	11.4	0.449	✓	✓	n/a	n/a
5-6	8	4	5/32	13	0.512	n/a	n/a	n/a	n/a
5-8	8	4	5/32	16.5	0.650	n/a	n/a	n/a	n/a
5-10	8	4	5/32	19.5	0.768	n/a	n/a	n/a	n/a
6-1	9.5	4.8	3/16	6.4	0.252	✓	✓	n/a	n/a
6-2	9.5	4.8	3/16	7.4	0.291	✓	✓	n/a	n/a
6-3	9.5	4.8	3/16	9.6	0.378	✓	✓	n/a	n/a
6-4	9.5	4.8	3/16	11	0.433	✓	✓	n/a	n/a
6-5	9.5	4.8	3/16	12.7	0.500	n/a	n/a	n/a	n/a
6-6	9.5	4.8	3/16	14.5	0.571	n/a	n/a	n/a	n/a
6-8	9.5	4.8	3/16	17.5	0.689	n/a	n/a	n/a	n/a
6-10	9.5	4.8	3/16	20.4	0.803	n/a	n/a	n/a	n/a
6-12	9.5	4.8	3/16	24	0.945	n/a	n/a	n/a	n/a

BBR10 P2 / 24mm Stroke



**MAX.
PULLING
FORCE
900KGS
(STROKE
20mm)**

MODEL NO.	BBR10 P2	
VOLTAGE	7.2 V	1.5Ah
PERFORMANCE	1.5 A	≈ 400 AS Rivets
MAX FORCE	900 KGS	992.3Lb
NO LOAD SPEED	4.0 mm/sec	9.4 in/min

A (HEAD DIA.)		B (BODY DIA.)		C (LENGT)		Al rivet	Steel rivet	Stainless Steel rivet	Stainless Steel rivet
Code	mm	mm	Inch	mm	Inch	Steel Shaft AS	Steel Shaft SS	Steel Shaft SSS	Steel Shaft SSSS
3-2	4.5	2.4	3/32	5.8	0.228	✓	✓	✓	✓
3-3	4.5	2.4	3/32	7.4	0.291	✓	✓	✓	✓
3-4	4.5	2.4	3/32	8.4	0.331	✓	✓	✓	✓
4-1	6.4	3.2	1/8	4.8	0.189	✓	✓	✓	✓
4-2	6.4	3.2	1/8	6.4	0.252	✓	✓	✓	✓
4-3	6.4	3.2	1/8	8	0.315	✓	✓	✓	✓
4-4	6.4	3.2	1/8	9.6	0.378	✓	✓	✓	✓
4-5	6.4	3.2	1/8	11.5	0.453	✓	✓	✓	✓
4-6	6.4	3.2	1/8	12.7	0.500	✓	✓	✓	✓
4-8	6.4	3.2	1/8	16.1	0.634	✓	✓	✓	✓
5-1	8	4	5/32	5.8	0.228	✓	✓	n/a	n/a
5-2	8	4	5/32	7	0.276	✓	✓	n/a	n/a
5-3	8	4	5/32	8.5	0.335	✓	✓	n/a	n/a
5-4	8	4	5/32	10	0.394	✓	✓	n/a	n/a
5-5	8	4	5/32	11.4	0.449	✓	✓	n/a	n/a
5-6	8	4	5/32	13	0.512	✓	✓	n/a	n/a
5-8	8	4	5/32	16.5	0.650	✓	✓	n/a	n/a
5-10	8	4	5/32	19.5	0.768	✓	✓	n/a	n/a
6-1	9.5	4.8	3/16	6.4	0.252	✓	✓	n/a	n/a
6-2	9.5	4.8	3/16	7.4	0.291	✓	✓	n/a	n/a
6-3	9.5	4.8	3/16	9.6	0.378	✓	✓	n/a	n/a
6-4	9.5	4.8	3/16	11	0.433	✓	✓	n/a	n/a
6-5	9.5	4.8	3/16	12.7	0.500	✓	✓	n/a	n/a
6-6	9.5	4.8	3/16	14.5	0.571	✓	✓	n/a	n/a
6-8	9.5	4.8	3/16	17.5	0.689	✓	✓	n/a	n/a
6-10	9.5	4.8	3/16	20.4	0.803	✓	✓	n/a	n/a
6-12	9.5	4.8	3/16	24	0.945	n/a	n/a	n/a	n/a



捷利科技股份有限公司
JELLEY TECHNOLOGY CO., LTD.

台中市大雅區中山八路122號2樓
2F, NO.122, ZHONGSHAN 8TH RD., DAYA DIST.,
TAICHUNG CITY, TAIWAN 42841

TEL: 886-4-25603253 FAX: 886-4-25678441
WEBSITE: www.jelley.com.tw EMAIL: service@jelley.com.tw